
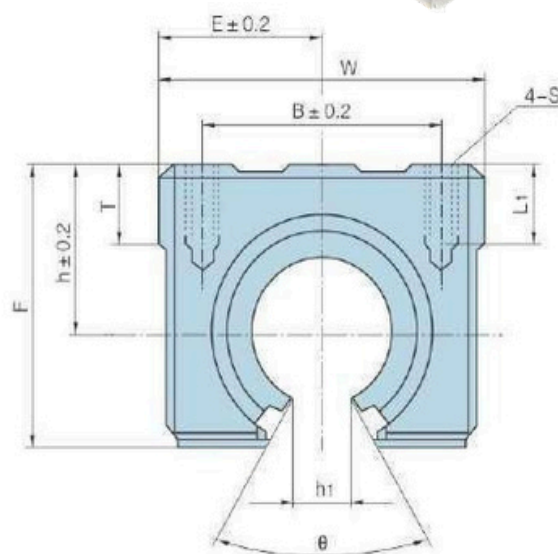


Pillow Block Aberto (SBR..UU)

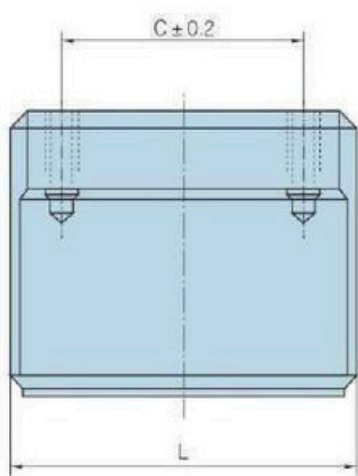


Modelo	h	E	W	L	F	h1	Ø	B	C	S	L1	T	Rolamento	Kgf C	Kgf CO	(g)
SBR12UU	17.5	20.5	41	39	27	7.5	80°	28	26	M5	10	9	LM12UU-OP	43	62	100
SBR13UU	17	20	40	39	27.6	8.5	80°	28	28	M5	10	8	LM13UU-OP	52	80	100
SBR16UU	20	22.5	45	45	33	10	80°	32	30	M5	12	9	LM16UU-OP	79	120	150
SBR20UU	23	24	48	50	39	10	60°	35	35	M6	12	11	LM20UU-OP	90	140	200
SBR25UU	27	30	60	65	47	11.5	50°	40	40	M6	12	14	LM25UU-OP	100	160	450
SBR30UU	33	35	70	70	56	14	50°	50	50	M8	18	15	LM30UU-OP	160	279	630
SBR35UU	37	40	80	80	63	16	50°	55	55	M8	18	18	LM35UU-OP	170	320	925
SBR40UU	42	45	90	90	72	19	50°	65	65	M10	20	20	LM40UU-OP	220	410	1330
SBR50UU	53	60	120	110	92	23	50°	94	80	M10	20	25	LM50UU-OP	389	809	3000

Kgf C: Carga Dinâmica

Kgf CO: Carga Estática

Pillow Block Aberto Alongado (SBR..LUU)

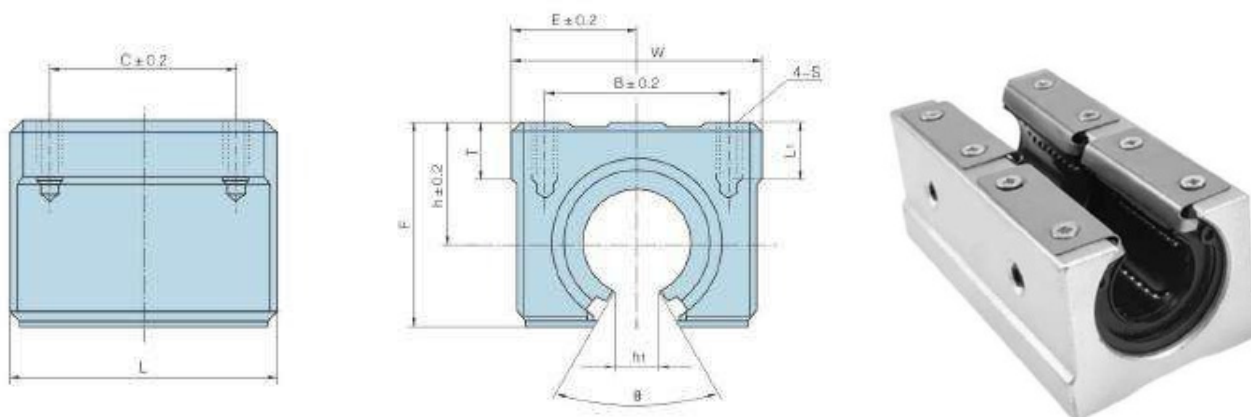

Modelo	h	E	W	L	F	h1	Ø	B	C	S	L1	T	ROLAMENTO	Kgf C	Kgf CO	(g)
SBR12 LUU	17.5	20.5	41	78	27	7.5	80°	28	50	M5	10	9	LM12UU-OP	122	203	180
SBR16 LUU	20	22.5	45	85	33	10	80°	32	60	M5	12	9	LM16UU-OP	157	240	300
SBR20 LUU	23	24	48	96	39	10	60°	35	70	M6	12	11	LM20UU-OP	178	279	400
SBR25 LUU	27	30	60	130	47	11.5	50°	40	100	M6	12	14	LM25UU-OP	199	320	900
SBR30 LUU	33	35	70	140	56	14	50°	50	110	M8	18	15	LM30UU-OP	320	558	1260
SBR40 LUU	42	45	90	175	72	19	50°	65	140	M10	20	20	LM40UU-OP	440	819	2660
SBR50 LUU	53	60	120	215	92	23	50°	94	160	M10	20	20	LM50UU-OP	779	1619	6000

Kgf C: Carga Dinâmica

Kgf CO: Carga Estática